


Bladder type expansion vessels

Potable water, water heating & hydro-pneumatic well applications

'reflex'

25 bar

CE

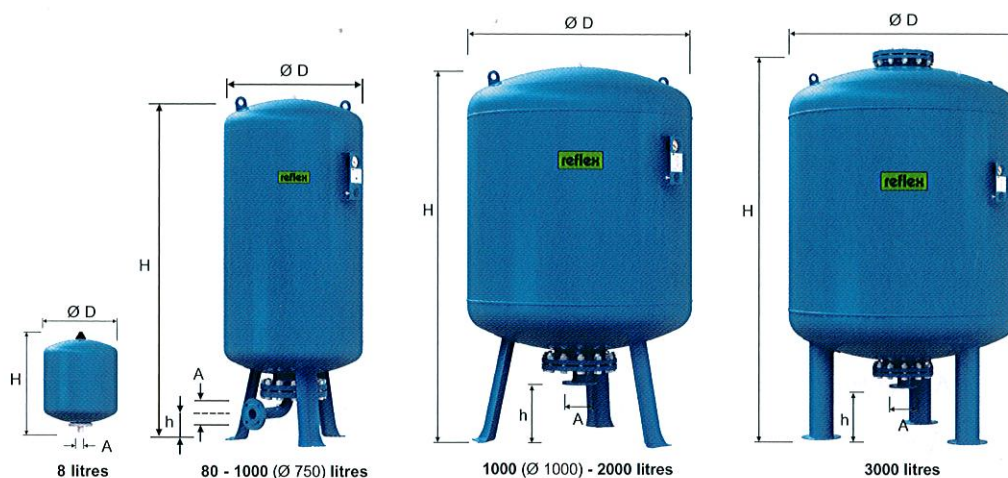

Type	Article-No.	Weight kg	Product group	Ø D mm	H mm	h mm	C
25 bar / 70 °C							
DE 8	7290100	3.5	40	206	320	---	G ¼
DE 80	7317600	95	44	450	925	185	DN 50 / PN 40
DE 120	7313700	130	44	450	1235	185	DN 50 / PN 40
DE 180	7313500	167	44	450	1515	185	DN 50 / PN 40
DE 300	7313800	189	44	750	1275	200	DN 50 / PN 40
DE 400	7313300	290	44	750	1395	200	DN 50 / PN 40
DE 600	7321500	392	44	750	1860	185	DN 50 / PN 40
DE 800	7321200	466	44	750	2260	185	DN 50 / PN 40
DE 1000 Ø 750	7321000	547	44	750	2760	185	DN 50 / PN 40
DE 1000 Ø 1000	7322200	674	44	1000	1980	210	DN 65 / PN 40
DE 1500	7322100	876	44	1200	2050	285	DN 65 / PN 40
DE 2000	7313400	1149	44	1200	2500	285	DN 65 / PN 40
DE 3000	7345700	1597	44	1500	2520	315	DN 65 / PN 40

↑ V_n Nominal volume [Litres]

'reflex DE' - Options upon request

- ▶ vessels > 25 bar
- ▶ flanged connections: DN 65 and DN 80
- ▶ butyl bladder according to German KTW-C norm
- ▶ inner lining against corrosion according to German KTW-A (food quality regulation)
- ▶ German TÜV factory test certification

reflex 'MBM II Diaphragm rupture detector'

- ▶ for the signalling of diaphragm rupture in 'reflex DE' 60 ltr and above
- ▶ consists of an electrode and electrode relay (factory-mounted)
- ▶ operates 230 V / 50 Hz supply
- ▶ three terminal dry contact
- ▶ recommended: 1 device for each vessel

Type	Article-No.	Product group
MBM II	7857700	86



Relay, to be wall-mounted



Electrode, fitted on the vessel (factory-mounted)

新法機械有限公司

NEW WAY ENGINEERING CO., LTD.

香港九龍新蒲崗六合街8號六合工業大廈22字樓F座

FLAT F, 22/F., LUK HOP INDUSTRIAL BUILDING,

8 LUK HOP STREET, SAN PO KONG, KOWLOON, H.K.

Tel : 2325 6892, 2325 7196

Fax No.: (852) 2322 1768

E-mail : info@newway.com.hk

reflex